

Shur-Loc Swivel Hooks


**SEE APPLICATION AND
WARNING INFORMATION**

 Para Español: www.thecrosbygroup.com On Pages 242-243


S-326A


- Forged Alloy Steel - Quenched and Tempered.
- Individually Proof Tested at 2-1/2 times the Working Load Limit with certification.
- Recessed trigger design is flush with the hook body, protecting the trigger from potential damage.
 - Easy to operate with enlarged thumb access.
- Positive Lock Latch is Self-Locking when hook is loaded.
- Rated for both Wire Rope and Grade 8 Chain.
- G-414 Heavy Thimble should be used with wire rope slings.
- Trigger repair Kit available (S-4316). Consists of spring, roll pin and trigger.
- S-3326 Swivel Hook utilizes anti-friction bearing design which allows hook to rotate freely under load.
- Fatigue rated.
- The SHUR-LOC® hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.550 (g) (4) (iv) (B).
- "Look for the color Gold - Crosby Alloy Hooks".
- U.S. Patent 5,381,650 and foreign equivalents.

Use in corrosive environment requires shank and nut inspection in accordance with ASME B30.10-1.2.1(b)(2)(c)2000.

S-326A SHUR-LOC® Swivel Hooks

- Suitable for infrequent, non-continuous rotation under load.

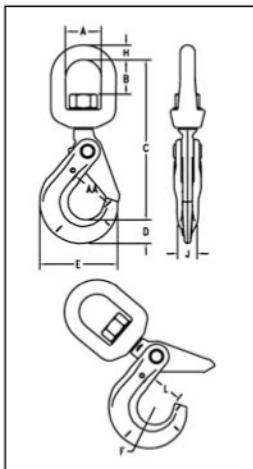

Chain Size		Grade 8 Alloy Chain Working Load Limit (lbs.) 4:1*	Wire Rope XXIP IWRC Mechanical Splice		S-326A Stock No.	Weight Each (lbs.)	Dimensions (in.)									
(in.)	(mm)		Size (in.)	Working Load Limit (lbs.) 5:1			A	B	C	D	E	F	H	J	L	AA
-	6	2500	5/16	2200	1004201	1.26	1.50	1.32	6.13	.79	2.60	.67	.50	.63	1.13	1.50
1/4-5/16	7-8	4500	7/16	4200	1004210	2.62	1.75	1.59	7.60	1.10	3.50	.87	.63	.81	1.38	2.00
3/8	10	7100	1/2	5600	1004223	4.70	2.00	1.73	8.83	1.17	4.39	1.10	.75	.94	1.75	2.50
1/2	13	12000	5/8	8600	1004234	8.64	2.50	2.38	11.20	1.67	5.45	1.26	1.00	1.16	2.11	3.00
5/8	16	18100	7/8	16600	1004235	17.00	2.75	2.53	12.98	2.05	6.56	1.50	1.13	1.50	2.49	3.50
3/4	18-20	28300	1	22000	1004244	24.00	2.83	2.52	17.42	2.22	7.76	2.01	1.10	2.03	3.52	5.00
7/8	22	34200	1-1/8	26500	1004254	29.00	3.44	3.19	16.47	2.45	8.75	2.26	1.30	2.20	3.83	6.00

* Ultimate Load is 4 times the Working Load Limit based on Grade 8 Chain.

