

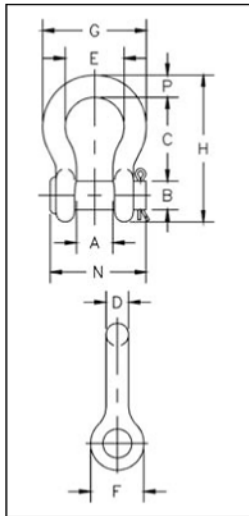
Round Pin Anchor Shackles

ROUND PIN ANCHOR SHACKLES


G-213 S-213

Round pin anchor shackles meet the performance requirements of Federal Specification RR-C-271D Type IVA, Grade A, Class 1, except for those provisions required of the contractor. For additional information, see page 391.

- Capacities 1/2 thru 35 metric tons.
- Forged - Quenched and Tempered, with alloy pins.
- Working Load Limit permanently shown on every shackle.
- Hot Dip galvanized or Self Colored.
- Fatigue rated.
- Shackles 25t and larger are **RFID EQUIPPED**.
- Shackles can be furnished proof tested with certificates to designated standards, such as ABS, DNV, Lloyds, or other certification. Charges for proof testing and certification available when requested at the time of order.
- Shackles are Quenched and Tempered and can meet DNV impact requirements of 42 joules at -20 degree C.
- Look for the Red Pin® . . . the mark of genuine Crosby quality.


G-213 S-213

| Nominal Size (in.) | Working Load Limit (t)* | Stock No. | | Weight Each (lbs.) | Dimensions (in.) | | | | | | | | | | | Tolerance +/- | |
|--------------------|-------------------------|-----------|---------|--------------------|------------------|------|------|------|------|------|------|-------|------|------|-----|---------------|--|
| | | G-213 | S-213 | | A | B | C | D | E | F | G | H | N | P | C | A | |
| 1/4 | 1/2 | 1018017 | 1018026 | .13 | .47 | .31 | 1.13 | .25 | .78 | .61 | 1.28 | 1.84 | 1.34 | .25 | .06 | .06 | |
| 5/16 | 3/4 | 1018035 | 1018044 | .18 | .53 | .38 | 1.22 | .31 | .84 | .75 | 1.47 | 2.09 | 1.59 | .31 | .06 | .06 | |
| 3/8 | 1 | 1018053 | 1018062 | .29 | .66 | .44 | 1.44 | .38 | 1.03 | .91 | 1.78 | 2.49 | 1.86 | .38 | .13 | .06 | |
| 7/16 | 1-1/2 | 1018071 | 1018080 | .38 | .75 | .50 | 1.69 | .44 | 1.16 | 1.06 | 2.03 | 2.91 | 2.13 | .44 | .13 | .06 | |
| 1/2 | 2 | 1018099 | 1018106 | .71 | .81 | .63 | 1.88 | .50 | 1.31 | 1.19 | 2.31 | 3.28 | 2.38 | .50 | .13 | .06 | |
| 5/8 | 3-1/4 | 1018115 | 1018124 | 1.50 | 1.06 | .75 | 2.38 | .63 | 1.69 | 1.50 | 2.94 | 4.19 | 2.91 | .69 | .13 | .06 | |
| 3/4 | 4-3/4 | 1018133 | 1018142 | 2.32 | 1.25 | .88 | 2.81 | .75 | 2.00 | 1.81 | 3.50 | 4.97 | 3.44 | .81 | .25 | .06 | |
| 7/8 | 6-1/2 | 1018151 | 1018160 | 3.49 | 1.44 | 1.00 | 3.31 | .88 | 2.28 | 2.09 | 4.03 | 5.83 | 3.81 | .97 | .25 | .06 | |
| 1 | 8-1/2 | 1018179 | 1018188 | 5.00 | 1.69 | 1.13 | 3.75 | 1.00 | 2.69 | 2.38 | 4.69 | 6.56 | 4.53 | 1.06 | .25 | .06 | |
| 1-1/8 | 9-1/2 | 1018197 | 1018204 | 6.97 | 1.81 | 1.25 | 4.25 | 1.13 | 2.91 | 2.69 | 5.16 | 7.47 | 5.13 | 1.25 | .25 | .06 | |
| 1-1/4 | 12 | 1018213 | 1018222 | 9.75 | 2.03 | 1.38 | 4.69 | 1.29 | 3.25 | 3.00 | 5.75 | 8.25 | 5.50 | 1.38 | .25 | .06 | |
| 1-3/8 | 13-1/2 | 1018231 | 1018240 | 13.25 | 2.25 | 1.50 | 5.25 | 1.42 | 3.63 | 3.31 | 6.38 | 9.16 | 6.13 | 1.50 | .25 | .13 | |
| 1-1/2 | 17 | 1018259 | 1018268 | 17.25 | 2.38 | 1.63 | 5.75 | 1.54 | 3.88 | 3.63 | 6.88 | 10.00 | 6.50 | 1.62 | .25 | .13 | |
| 1-3/4 | 25 | 1018277 | 1018286 | 29.46 | 2.88 | 2.00 | 7.00 | 1.84 | 5.00 | 4.19 | 8.86 | 12.34 | 7.75 | 2.25 | .25 | .13 | |
| 2 | 35 | 1018295 | 1018302 | 45.75 | 3.25 | 2.25 | 7.75 | 2.08 | 5.75 | 4.81 | 9.97 | 13.68 | 8.75 | 2.40 | .25 | .13 | |

* NOTE: Maximum Proof Load is 2.0 times the Working Load Limit. Minimum Ultimate Strength is 6 times the Working Load Limit. For Working Load Limit reduction due to side loading applications, see page 74.

Load Rated Fatigue Rated



MAXTOUGH