

Tuflex Endless Roundslings



Tuflex Endless (EN)

The Most Versatile Tuflex Roundslings

Features, Advantages and Benefits


Maintains all the basic *Tuflex* features plus...

Promotes Safety

- Load stability and balance can be achieved by spreading sling legs.

Saves Money

- Wear points can be shifted to extend sling life
- The most flexible style of sling

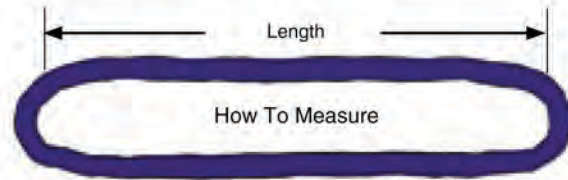

Part No.	Color	Rated Capacity (lbs.)*			Minimum Length (ft.)	Approximate Measurements			
		Vertical	Choker	Basket		Weight (lbs. / ft.)	Body Dia. Relaxed (in.)	Width at Load (in.)	Minimum Hardware Dia. ** (in.)
EN30	Purple	2,600	2,100	5,200	1 1/2	.2	5/8	1 1/8	1/2
EN60	Green	5,300	4,200	10,600	1 1/2	.3	7/8	1 1/2	5/8
EN90	Yellow	8,400	6,700	16,800	3	.5	1 1/8	1 7/8	3/4
EN120	Tan	10,600	8,500	21,200	3	.6	1 1/8	2 1/8	7/8
EN150	Red	13,200	10,600	26,400	3	.8	1 3/8	2 1/4	1
EN180	White	16,800	13,400	33,600	3	.9	1 3/8	2 1/2	1 1/8
EN240	Blue	21,200	17,000	42,400	3	1.3	1 3/4	3	1 1/4
EN360	Grey	31,000	24,800	62,000	3	1.7	2 1/4	3 3/4	1 1/2
EN600	Brown	53,000	42,400	106,000	8	2.8	2 3/4	4 5/8	1 7/8
EN800	Olive	66,000	52,800	132,000	8	3.4	3 1/8	5 1/4	2 1/8
EN1000	Black	90,000	72,000	180,000	8	4.3	3 5/8	6	2 1/2

* **WARNING** Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to Effect of Angle chart page 10.

** This is the smallest recommended connection hardware diameter to be used for a vertical hitch.